


ATHENA 1090 EVO

DIMENSIONS

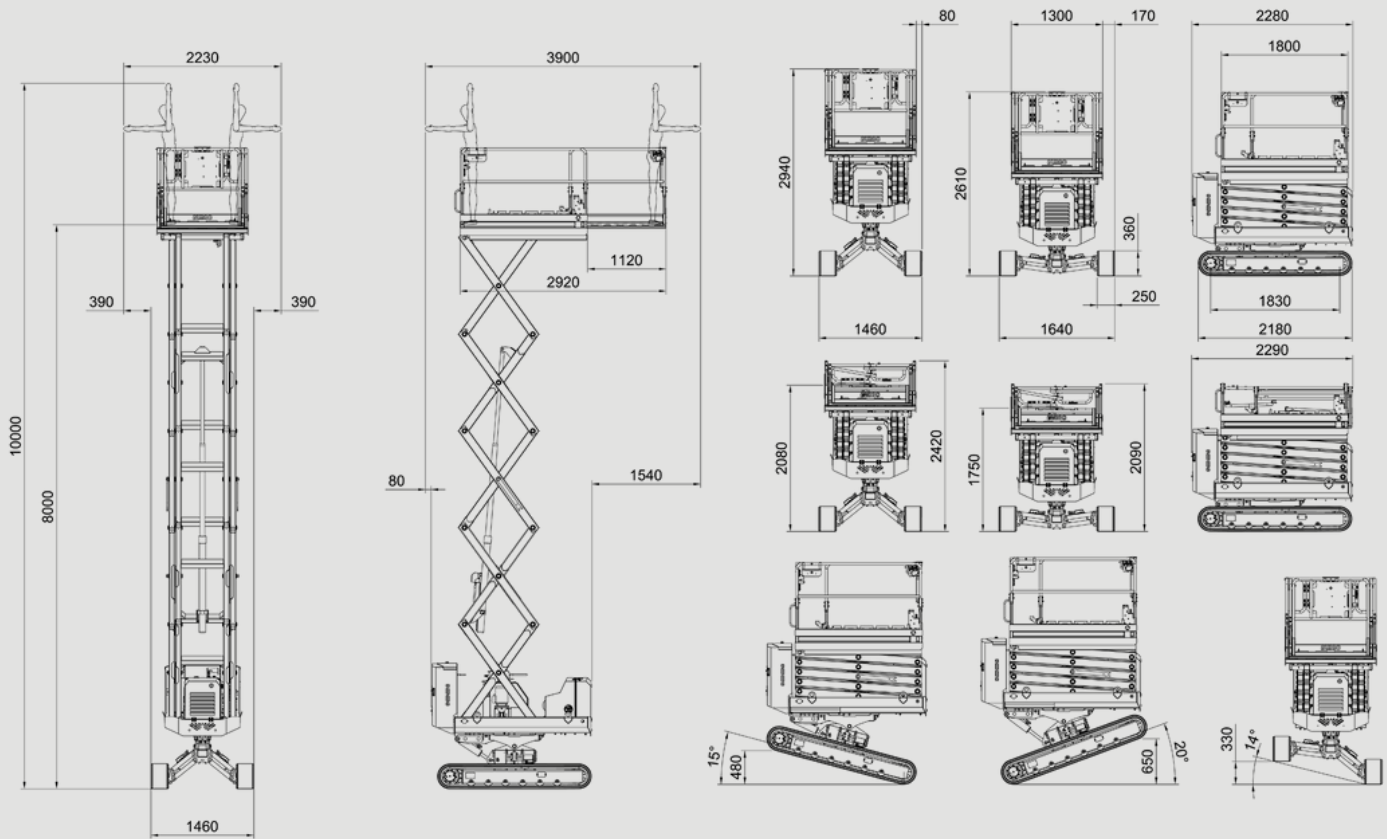

ALL DATA REPORTED IN THIS CATALOGUE ARE NOT BINDING. ALMAC SRL RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE.

ATHENA 1090 EVO

SPECIFICATIONS

Basket capacity	300 kg (2 op.)
Max working height	10 m
Max height basket floor	8 m
Moving height	7 m
Powered	Kubota Z602
Accelerator	(12.5kW) Auto
Undercarriage	Bi-levelling
Basket levelling	Auto
Longitudinal levelling front	+/- 15°
Longitudinal levelling rear	+/- 20°
Lateral levelling	+/- 14°
Power generator (option)	220V-1kW
Electric pump (option)	220V-2kW
Hydraulic commands	Proportionals

Dynamic levelling system	Yes
Pro Active levelling system	Yes
Direction control system	Yes
Easy-drive system	Yes
Kit for high speed	max 2.7
Ground emergency	km/h Yes
Control of inclination	Auto
Gradeability	25°
Side slope	21°
Length	2.26 m
Width	1.46 ÷ 1.64
Min. machine height with folded	m 2.05
railings Total weight	(1.89) m
Compliance	EN 280, CE, ANSI, CSA, AS/NZS1418